


REF. 9408 DUOX VEO-XS MONITOR

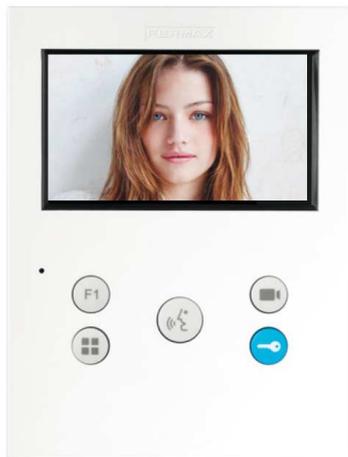

Hands-free communication. Dimensions: 125 x 165 x 21 mm Automatic picture capture when the visitor calls (PHOTOCALLER)

Hands-free VEO-XS monitor. Characterised by its small size and extra-flat thickness. Thanks to its OSD menu and the layout of the buttons, interaction with the user is simple and intuitive. Made of high impact ABS plastic. Texturised finish for easy cleaning and ultraviolet protection. Surface installation. VEO-XS incorporates a 4,3" (16:9) panoramic color TFT screen. Its balanced design of pure lines is distinguishing, modern and minimal. VEO-XS integrates in the ambience.

When a call is received, the image appears automatically. When the button is pressed a conversation with the visitor can take place. The image is de-activated automatically after 90 seconds, or when the button is pressed again. To open the door, press the button .

ACCESSORIES



Ref. 9407

-CONNECTOR

9407 DUOX VEO-XS MONITOR CONNECTOR

Necessary to mount the monitor on the wall surface.



Ref. 3388

-REPLACEMENT

3388 UNIVERSAL FRAME 120X240

Universal frame with an extra slim format, it is manufactured in a high resistant ABS plastic with a texturised finish. In replacement works, allows to cover the space left by older equipment. In addition, it keeps the wall protected from the dirt produced by the use of telephones and monitors. Dimensions: 120 x 240 x 10 mm.



Ref. 3389

3389 UNIVERSAL LARGE FRAME 210X240

Dimensions: 120 x 240 x 10 mm

GENERAL CHARACTERISTICS	9408
Technology	DUOX (non-polarized 2 wire full digital system)
Audio/Video system	Audio/Video Color
Set-up (Installation)	Surface mounted (order connector ref. 9407 separately)
Desktop support	-
Hands-free communication	Yes
Press-to-talk communication configurable	Yes
Induction loop included	Yes (order monitor FFR09408)
Screen dimensions	4,3" (Panoramic 16:9)
Screen resolution (H x V)	480 x 272
Color of the product	Matt white
Number of pushbuttons	5
Kind of pushbuttons	Mechanical (silicon)
Number of leds for lighted indications	3 (red, blue and green with different states)
PROGRAMMING OF THE TERMINAL ADDRESS	
From the terminal	From the OSD menu
From the outdoor panel or guard unit	Yes
From the outdoor panel throughout the apartment door bell	Yes
FEATURES	
Automatic picture capture when the visitor calls (PHOTOCALLER)	Yes (1 photo/call, until 150 photos, 320 x 240 pixels). This feature can be disabled by the user.
Guard unit call	Yes (by means of the door release button)
Auto-on	Yes (with 3 outdoor panels)
OSD menu	Yes
Additional function F1	Yes (Button F1 sends a negative and/or command)
Additional function F2	Yes (it only sends command, no negative)
Apartment door bell differentiated from the outdoor panel	Yes
Connection for additional devices (call extension, light/buzzer activator, etc.)	Yes (ref. 2040, ref. 2438, ref. 3257)
Additional terminals on the same address	Yes, max. 2 additional terminal (additional power supply can be required)
Doormatic (automatic door release for offices, etc.)	Yes (configurable until 12h). Green Led ON.
ADJUSTMENTS	
Date and time	Yes
Ring tones selection	Yes (5)
Call volume control	Yes (8 levels by OSD menu and sliding wheel)
Do-not-disturb mode	Yes (by OSD menu) + Red led indication.
Audio volume control	Yes (8 levels by OSD menu and sliding wheel)
Brightness, color and contrast control	Yes (by OSD menu)
TECHNICAL FEATURES	
Product dimensions (width x height x depth) mm	125 x 165 x 21
Time to answer or open the door since the call is done	30 s.
Conversation time	90 s.
Conversation privacy	Yes
Voltage	18 Vdc
Maximum consumption (mA) / Standby consumption (mA)	370 / 38
Working temperature (°C); Humidity	[-5°C, +40°C]; [0%, 90%]
Product Weight (kg)	0,29
Line adaptor included in the terminal	Yes (A, C, default position OFF)
Connections	Bin, Bin, Bout, Bout, -, A+, F1, T