

## Touch screen



Digital TFT colour monitor with capacitive touch screen that facilitates an intuitive use.  
3 shortcut buttons for a quick access without using the screen.



## Intercom



Establish communication with another installed monitor inside the house.  
In the 2 apartments kit the option to call the other apartment is available as well.



## Playback



After 3 seconds the monitor automatically records a video (in case there is a micro SD Card installed) or takes a picture (in case there isn't) of the visitors.  
While answering, you also have the option to manually take a snapshot of your visit.  
The recorded videos/pictures from the outdoor panel will be played on the screen.



Capacity:  
118 pictures (without micro SD Card) or audio&video record up to 32GB (with micro SD Card).

## Do not disturb



Take your time to relax.  
Activate the "Do not disturb" function for 1 HOUR, 8 HOURS or ALWAYS.



## Call record



All the calls from panel-to-monitor, monitor-to-monitor and between monitors will be recorded and can be reviewed afterwards.

Call recorded 01/08

↓	▶	06-23	15:22	Neighbour
↓	▶	06-18	20:54	Outdoor panel
↓	▶	06-12	21:43	Neighbour
↓	▶	05-29	13:16	Inner call
↓	▶	06-18	21:43	Neighbour

**FERMAX**  
**Way Kit.**

Video Door Entry Systems



For those who like to do things differently...

Do it your **Way**



## FERMAX Way Kit

A kit that includes a 7" monitor which allows you to manage the many advanced features offered through its capacitive touch screen.


Captures images from your visits or record them, access to the call log, mute the sound if you do not want to be disturbed, and all this in one single kit.

### Monitor

Digital 7" TFT colour monitor with capacitive touch screen

#### Monitor specifications

- Power supply for monitor: DC 24~28V.
- Power consumption: Standby 12mA; Working 350mA.
- Monitor screen: 7 Inch digital colour TFT. Capacitive touch screen.
- Video signal: 1 Vpp, 75Ω, CCIR standard.
- Wiring: 2 wires, no polarity.
- Dimensions: 225(W) x 131(H) x 18(D)mm.

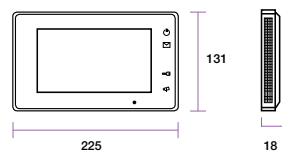


### Outdoor panel

The Way kit includes a video door entry panel made of zamak metal with high sensitivity colour CCD camera as standard. Surface installation.



#### Panel specifications

- Zamak.
- Large backlit cardholder.
- Rainy hood for surface mounting.
- Colour CCD camera with high sensitivity.
- Auto-sensor led illumination.
- One relay lock control.
- Dimensions: 95(W) x 155(H) x 25(D)mm.
- Needs to be installed with hood.

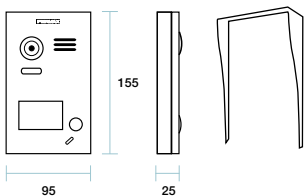

The products shown are for information only.

## Way Kits

for 1 & 2 residences

Technology: 2 wires non-polarized



### plug&play

The monitor and the door entry panel are already programmed and ready for installation!



#### REF. 1401 1/W video way kit

The kit includes:

- 1/W video door entry panel with hood (ref.1416).
- 7" TFT colour monitor with touch screen.
- Power supply (ref.1410).



#### REF. 1402 2/W video way kit

The kit includes:

- 2/W video door entry panel with hood (ref.1417).
- 7" TFT colour monitor with touch screen (two units).
- Power supply (ref.1410).

#### Kit extensions

The WAY kit can be extended with a 2<sup>nd</sup> monitor in the house without extra power supply.

Extensions for 1/w video Way kit: monitor (ref.1412).

- ref.1412 Monitor (for 1<sup>st</sup> house).
- ref.1413 Monitor (for 2<sup>nd</sup> house).


## Settings



Brightness, contrast, selection of melodies, date & time, scene mode (brightly, soft and user), ring volume for day time and night time, language selection (16 different), etc.



## Diagram of installation

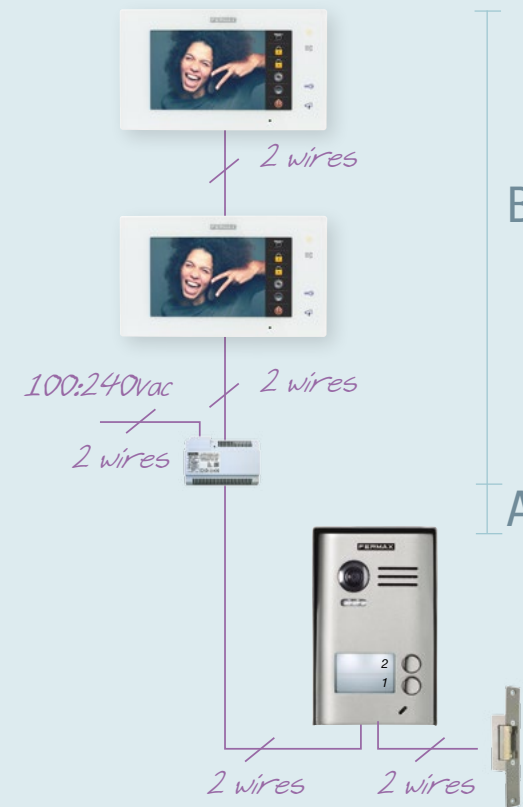

CABLE USAGE	A	B
Twisted cable 2x0,75mm <sup>2</sup>	60m	60m
Twisted cable 2x1mm <sup>2</sup>	80m	80m

Power-supply included in the kit limited for a 12Vdc 250mA door-lock.